



thermsaver

OIL HEATING SOLUTIONS

oil fired condensing boilers

all SEDBUK band **A** rated

97% net efficiency

the **first name** in
oil fired boilers

OIL FIRED BOILERS • FLUES • ACCESSORIES

thermsaver Condensing Outdoor Combi


SEDBUK band **A** rated

97% net efficiency



GENERAL DATA

Electrical Supply:	240V ~ 50Hz
Fuel:	28 second
Maximum Control Thermostat Setting:	85°C
High Limit Stat:	Manual Reset
Oil Supply Connection:	¼ BSP
Maximum Operating Pressure:	3BAR 45 PSI
	28m Static Head Room
Draught Limit:	Min - 12.5Nm ² - 0.05" WG Max - 33.0Nm ² - 0.12" WG

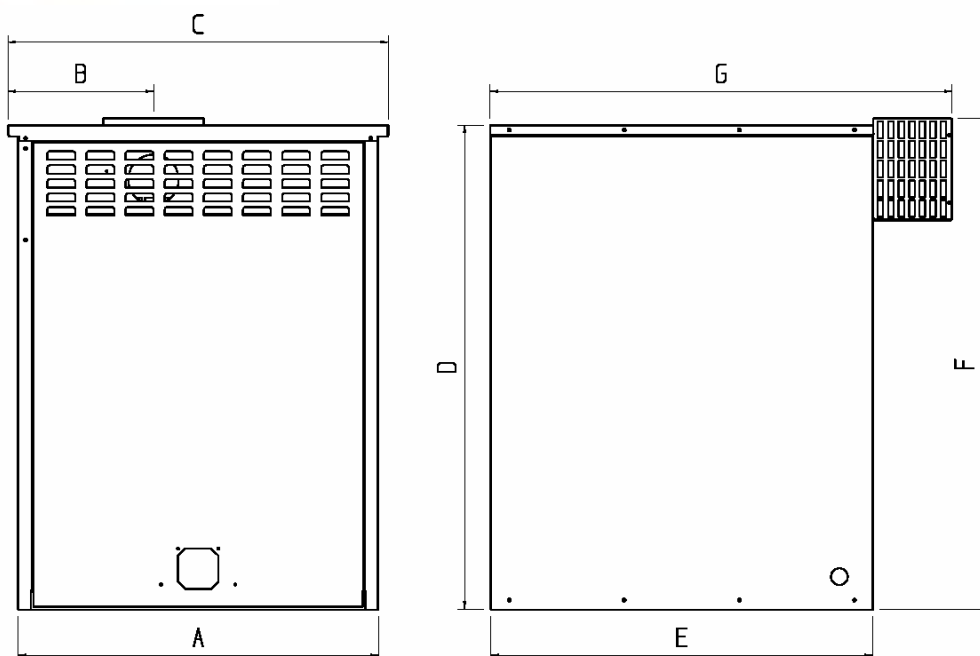

Dimensions (mm)	15/21kW	21/27kW	27/38kW
A	645	645	645
B	260	260	260
C	681	681	681
D	868	868	868
E	684	684	684
F	880	880	880
G	827	827	827

WE RECOMMEND THE
HONEYWELL CM67 WIRELESS THERMOSTAT
 OR
thermsave TH-0471 DIGITAL PROGRAMMER
 ALONG WITH THE
thermsave PROGRAMMABLE ROOM THERMOSTAT
 FOR USE WITH THIS PRODUCT

thermsaver

1, Croftbank Crescent, Uddingston, Glasgow G71 7JD

Telephone: 01698 327997

Fax: 01698 327776

www.thermsaver.co.uk info@thermsaver.co.uk



Copyright of the contents is secured by **thermsaver** and may not be reproduced, in whole or part, without permission. **thermsaver** have a continuing research and development programme which occasionally necessitates changes to specifications herein. It is, therefore essential that instructions issued with each individual appliance are carefully read prior to installation and strictly adhered to during installation. The statutory rights of the customer are not affected.