



thermsaver

OIL HEATING SOLUTIONS

oil fired condensing boilers

all SEDBUK band **A** rated

97% net efficiency

the **first name** in
oil fired boilers

OIL FIRED BOILERS • FLUES • ACCESSORIES


thermsaver Condensing Slimline Outdoor

SEDBUK band A rated
97% net efficiency



GENERAL DATA

Electrical Supply:	240V ~ 50Hz
Fuel:	28 second
Maximum Control Thermostat Setting:	85°C
High Limit Stat:	Manual Reset
Oil Supply Connection:	¼ BSP
Maximum Operating Pressure:	3BAR 45 PSI
	28m Static Head Room
Draught Limit:	Min - 12.5Nm ² - 0.05" WG Max - 33.0Nm ² - 0.12" WG

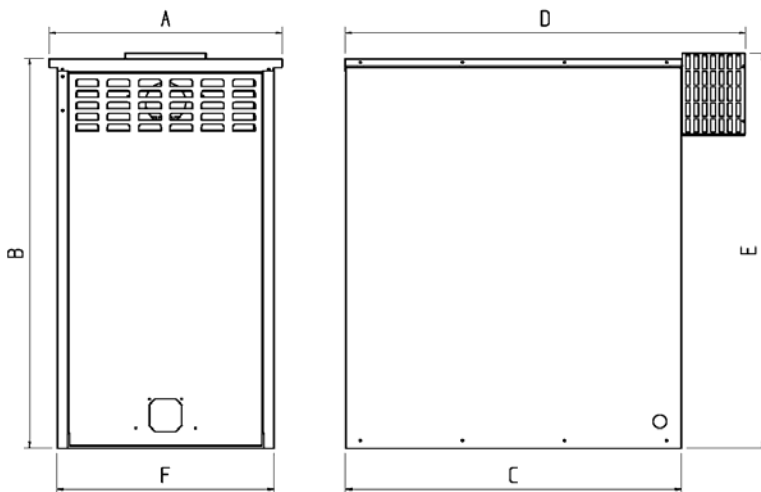

FREE FROST STAT
WITH
ALL OUTDOOR MODELS

Dimensions (mm)	15/21kW	21/27kW	27/38kW
A	521	521	521
B	868	868	868
C	750	750	750
D	894	894	894
E	880	880	880
F	485	485	485

WE RECOMMEND THE
HONEYWELL CM67 WIRELESS THERMOSTAT
OR
thermsave TH-0471 DIGITAL PROGRAMMER
ALONG WITH THE
thermsave PROGRAMMABLE ROOM THERMOSTAT
FOR USE WITH THIS PRODUCT

thermsaver

1, Croftbank Crescent, Uddingston, Glasgow G71 7JD
Telephone: 01698 327997
Fax: 01698 327776

www.thermsaver.co.uk info@thermsaver.co.uk



Copyright of the contents is secured by **thermsaver** and may not be reproduced, in whole or part, without permission. **thermsaver** have a continuing research and development programme which occasionally necessitates changes to specifications herein. It is, therefore essential that instructions issued with each individual appliance are carefully read prior to installation and strictly adhered to during installation. The statutory rights of the customer are not affected.