





## EURC4L Senator

### Floor-standing combi/system boilers

#### 50/70 Combi Boiler

Height	860mm
Depth	590mm
Width	555mm
Heating return in BSP	1"
Conventional flue diameter	100-125
Combi heating flow	22
Combi safety relief O/F	15
Domestic hot water	15
Combi cold mains	15
Boiler weight in(kg)	150

#### 70/90 Combi Boiler

Height	860mm
Depth	590mm
Width	555mm
Heating return in BSP	1"
Conventional flue diameter	100-125
Combi heating flow	22
Combi safety relief O/F	15
Domestic hot water	15
Combi cold mains	15
Boiler weight in(kg)	155

#### 90/115 Combi Boiler

Height	950mm
Depth	630mm
Width	585mm
Heating return in BSP	1"
Conventional flue diameter	100-125
Combi heating flow	22
Combi safety relief O/F	15
Domestic hot water	15
Combi cold mains	15
Boiler weight in(kg)	185

#### 50/70 & 70/90 System Boilers

Height	860mm
Depth	590mm
Width	555mm
Heating return in BSP	1"
Conventional flue diameter	100-125
System boiler heating flow	22
Boiler weight in(kg)	108

#### General Data

Electrical supply	240v~50Hz
Oil supply connection	1/4" BSP
Fuel	28 second or 35 second
High limit stat	manual reset
Maximum control thermostat setting	85°C
Maximum operating pressure expansion vessel capacity	12 litres
Spring safety valve	3 Bar

compact  
and  
efficient

Offering efficient heating and lashings of hot water on demand, for your comfort the stylish floor-standing Senator combi recovers quickly. Easily installed and front-access maintained, because it is fed direct by the cold water main, it doesn't need a cylinder or a header tank, saving you valuable space.

- With the exception of the 90/115 all the Senator range fit under standard kitchen work surfaces
- It incorporates a simple 24-hour time switch for easy central heating control
- Easily sited, thanks to a multi-directional push fit round telescopic flue
- Fitted with a resettable safety device which shuts off the boiler if a system leak occurs or a thermostat fails
- Comes with its pump, pressure vessel and auxiliary equipment factory fitted to save on labour and material costs
- Odour free, it's also pre-wired and pre-piped



Grundfos Pump



Time Switch



Mixer Valve

# a flue that's perfect for you

To ensure optimum boiler performance and extremely low running noise, EUROCAL complement their extensive range of multi-directional flued oil boilers with a very simple push fit round flue system.

All internal flue sections have a white enamelled gloss finish. Both horizontal and vertical flue terminals are pleasing to the eye; the horizontal having a polished stainless steel finish, whilst the vertical terminal is black.

They are also exceptionally easy on the installer, as all that is needed to install them is a standard-size core drill.

**Kit 1 Horizontal low level telescopic flue kit**  
can be used in conjunction with kits 3 & 6



**Kit 6 950mm Extension flue kit**  
can be used in conjunction with kits 1, 4, 5, 6 & 8



**Kit 3 300 Extension flue kit**  
can be used in conjunction with kits 1, 4, 5, 6 & 8





**Kit 5 vertical roof terminal flue kit**  
can be used in conjunction with kits 3, 6 & 8



**Kit 4 High level terminal flue kit**  
can be used in conjunction with kits 3 & 6

**Kit 8 2x45° elbows**  
can be used in conjunction with kits 1, 3, 5, 6 & 8

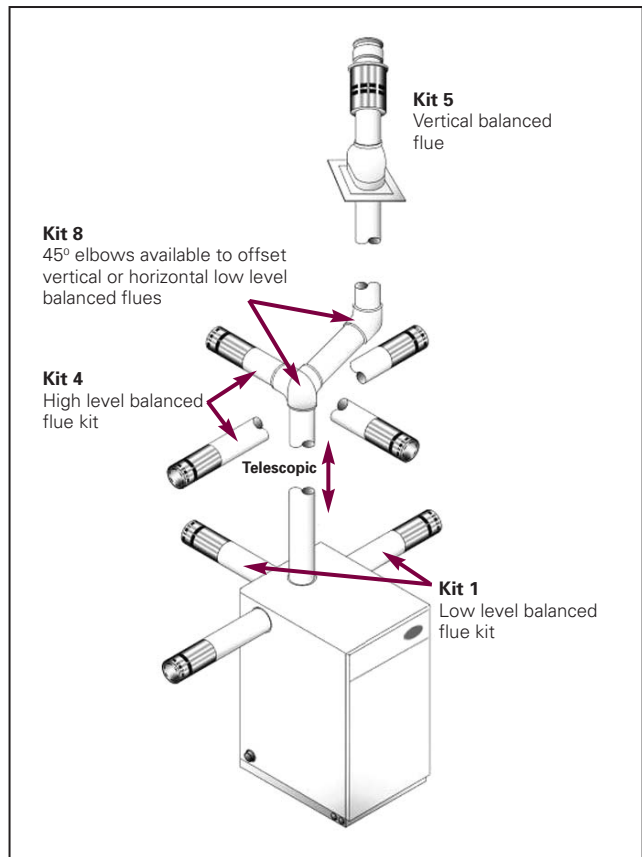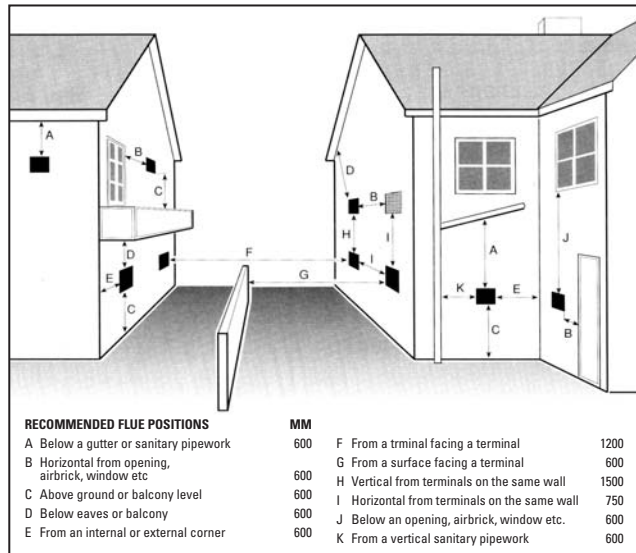

## TURKINGTON ENGINEERING LIMITED

Unit 12, Whitegate Industrial Estate  
Wrexham, LL13 8UG  
Tel: 01978 363048 or 01978 363049  
Fax: 01978 363046

For further details about our training courses contact:

EUROCAL Boilers on Wrexham 01978 363048 or our trainers direct at:

**EUROCAL Oil Boiler Training Centre**  
Unit 2, Century Buildings, Mansfield, Nottinghamshire, NG18 5SF  
Telephone: 01623 629200/621326.



Your local stockist

Turkington Engineering have a continuing research and development programme which occasionally necessitates changes to specifications herein. It is, therefore, essential that instructions issued with each individual appliance are carefully read prior to installation and strictly adhered to during installation. The statutory rights of the customer are not affected.