



EURCAL



Outdoor boilers

50/70 Combi Boiler

Height	878mm
Depth	630mm
Width	765mm
Heating return system & combi in BSP	1"
Combi heating flow	22
Combi safety relief valve	15
Domestic hot water	15
Cold mains supply	15
Boiler weight in(kg)	160

70/90 Combi Boiler

Height	878mm
Depth	630mm
Width	765mm
Heating return system & combi in BSP	1"
Combi heating flow	22
Combi safety relief valve	15
Domestic hot water	15
Cold mains supply	15
Boiler weight in(kg)	165

90/115 Combi Boiler

Height	916mm
Depth	630mm
Width	565mm
Heating return system & combi in BSP	1"
Combi heating flow	22
Combi safety relief valve	15
Domestic hot water	15
Cold mains supply	15
Boiler weight in(kg)	175

50/70 & 70/90 System Boilers

Height	878mm
Depth	630mm
Width	765mm
System boiler heating flow	22
Heating return system & combi in BSP	1"
Boiler weight in(kg)	120

50/70 Standard Boiler

Height	878mm
Depth	630mm
Width	765mm
Standard outdoor water connections in BSP	4x1
Boiler weight in(kg)	105

70/90 Standard Boiler

Height	878mm
Depth	630mm
Width	765mm
Standard outdoor water connections in BSP	4x1
Boiler weight in(kg)	110

90/115 Standard Boiler

Height	878mm
Depth	630mm
Width	765mm
Standard outdoor water connections in BSP	4x1
Boiler weight in(kg)	130

General Data

Electrical supply	240v-50Hz
Oil supply connection	1/4" BSP
Fuel	28 second or 35 second
High limit stat	manual reset
Maximum control thermostat setting	85°C
Expansion vessel capacity	12 Litres
Maximum operating pressure	3 Bar

power and independence

Ideal where space is at a premium, or if you don't want the boiler in the house the Countryman has been designed to be sited outside the home. Housed in a free standing heavy-duty, frost protected, insulated weatherproof case complete with integral flue it's also exceptionally easy to install and service.

- All pipe work and components are factory fitted where applicable
- Like all EUROCAL boilers, it complies with all the latest building regulations
- With a lockable access panel at the front the Countryman is easy to service and maintain



Dual Thermostat



Grundfos Pump



Sterling Burner

a flue that's perfect for you

To ensure optimum boiler performance and extremely low running noise, EUROCAL complement their extensive range of multi-directional flued oil boilers with a very simple push fit round flue system.

All internal flue sections have a white enamelled gloss finish. Both horizontal and vertical flue terminals are pleasing to the eye; the horizontal having a polished stainless steel finish, whilst the vertical terminal is black.

They are also exceptionally easy on the installer, as all that is needed to install them is a standard-size core drill.

Kit 1 Horizontal low level telescopic flue kit
can be used in conjunction with kits 3 & 6



Kit 6 950mm Extension flue kit
can be used in conjunction with kits 1, 4, 5, 6 & 8



Kit 3 300 Extension flue kit
can be used in conjunction with kits 1, 4, 5, 6 & 8





Kit 5 vertical roof terminal flue kit
can be used in conjunction with kits 3, 6 & 8



Kit 4 High level terminal flue kit
can be used in conjunction with kits 3 & 6

Kit 8 2x45° elbows
can be used in conjunction with kits 1, 3, 5, 6 & 8

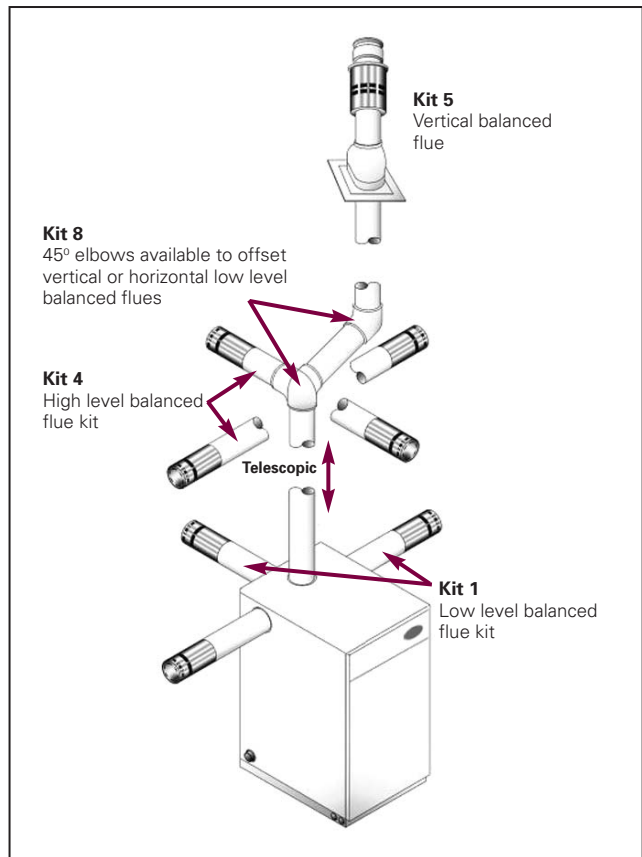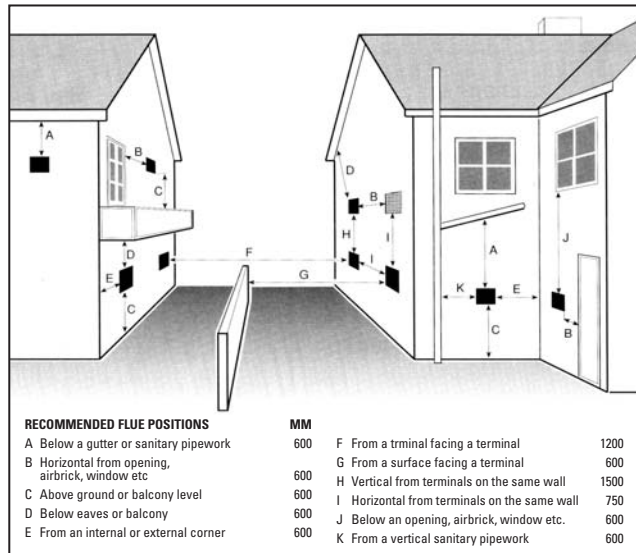

TURKINGTON ENGINEERING LIMITED

Unit 12, Whitegate Industrial Estate
Wrexham, LL13 8UG
Tel: 01978 363048 or 01978 363049
Fax: 01978 363046

For further details about our training courses contact:

EUROCAL Boilers on Wrexham 01978 363048 or our trainers direct at:

EUROCAL Oil Boiler Training Centre
Unit 2, Century Buildings, Mansfield, Nottinghamshire, NG18 5SF
Telephone: 01623 629200/621326.



Your local stockist

Turkington Engineering have a continuing research and development programme which occasionally necessitates changes to specifications herein. It is, therefore, essential that instructions issued with each individual appliance are carefully read prior to installation and strictly adhered to during installation. The statutory rights of the customer are not affected.